

MB20

Multi - Biometric T&A and Access Control Terminal




Features

- Fingerprint, face, RFID and password 4 type verification mode
- High-speed identification less than 1 second
- TCP/IP Port for Internet connection
- Access Port available to control one lock and exit button
- Optional 5V 1900mAH UPS, standby up to 3 hours

Specification

Product		MB20
Main	Biometric RF Optional	Fingerprint and Face 125kHz ID / 13.56MHz IC
Capacity	Max User(1:N) Max Fingerprint (1:N) Max Face (1:N) Max Record	1,000 500 (Optional: 2,000) 200 (Optional: 500) 50,000
Interface	TCP/IP USB Relay	10M/100M USB 2.0 (Host) 1 Relay
Hardware	LCD Sound Operating Temp. Operating Humidity Power Dimensions(W x H x D mm)	2.8" Color LCD Stereo speaker 0 °C- 45 °C 20% ~ 80% DC 5V 0.8A 161.93 x 152.82 x 30.59
Function	Standard	Automatic Status Switch, Self-Service Query, DST, T9 Input 9 Digit User ID, Scheduled Bell, Photo ID, TCP/IP, USB-host Lock, sensor, Exit button
	Optional	ID / IC / ADMS / HTTPS
Compatibility		ZKBio Time.Net ZKBio Time ZKBio CVAccess (T&A Module) Zlink Assistant

Configuration

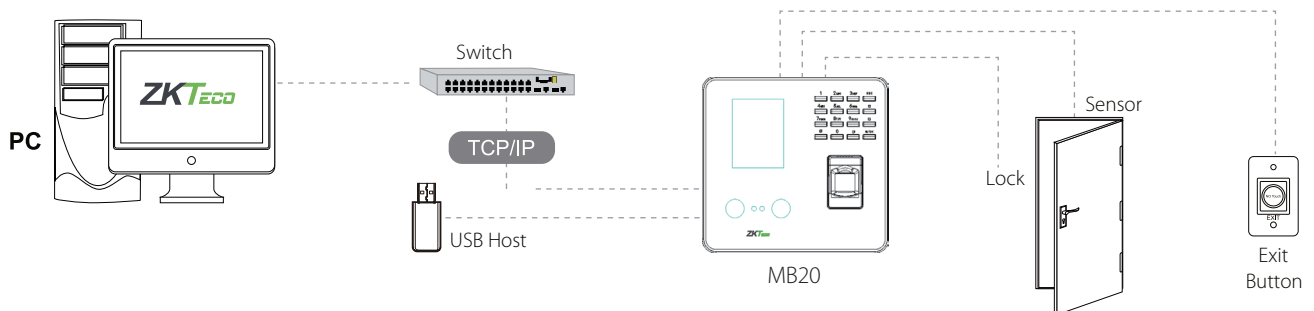

Dimensions (mm)

